


Catalog 140
X Switches
80 A-630A

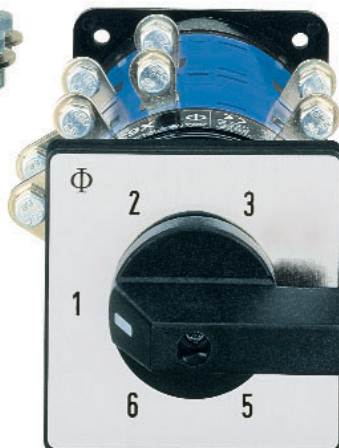

KRAUS & NAIMER


The development of the Blue Line rotary switch, contactor and motor starter product ranges is based on more than seventy-five years experience by Kraus & Naimer in the design and manufacture of electrical switchgear. Kraus & Naimer pioneered the introduction of the cam operated rotary switch and continues to be recognized as the world leader in that product field.

BLUE LINE

Blue Line products are protected by numerous patents throughout the industrial world. They are built to national and international standards and designed to withstand adverse temperatures and climates.

Blue Line products are accepted and universally recognized for their quality and workmanship. They are supported by a worldwide sales and service organization.

The Kraus & Naimer Registered Trademark



WORLDWIDE SYMBOL
FOR QUALITY SWITCHGEAR

Disconnectors and Main Switches acc. to IEC 60947-3 see Catalog 500

Contents	Page
Construction Data	2
Dimensions and Nominal Ratings	2
How to order	3, 4
Switch Function and Configuration	
ON/OFF Switches	5
Double-throw Switches	6
Multi-step Switches	7-10
Types of Mounting	
Front Mounting	11
Base Mounting	11
Handles	12
Escutcheon Plates	13
Technical Data	14
International Standards and Approvals	15
Dimensions	
Handles and Escutcheon Plates	16
Front Mounting and Base Mounting:	
X63, X100, X200	17
X160, X400	18
X630	19
Blue Line Switchgear:	
Summary	20


Construction Data

X switches are highly compact cam operated switches which meet the requirements of IEC 60947-3 for switches. Each stage contains 6 double-break contacts operated by a triple cam, providing a minimum length dimension for mounting purposes with a larger number of contacts. They are mainly used as general application switches and multi-step switches.

X switches are available with up to 6 stages. Up to 36 contacts are operated in up to 18 switch positions.

Switching angle may be 20°, 30°, 45°, 60° or 90°.

A wide range of optional extras, escutcheon plates and handles is available.

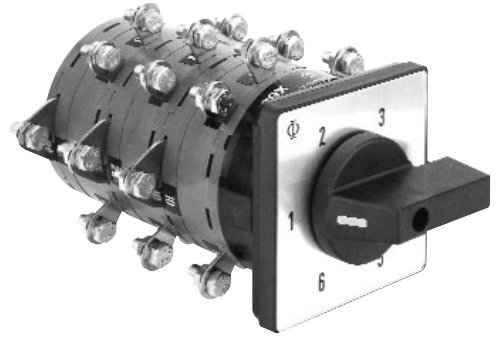


Switch Size

Type


Nominal Ratings

S2

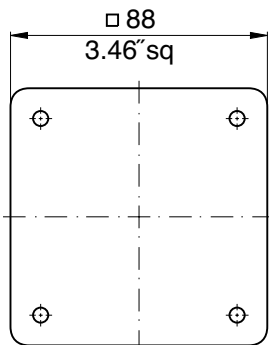

X63
X160

S3

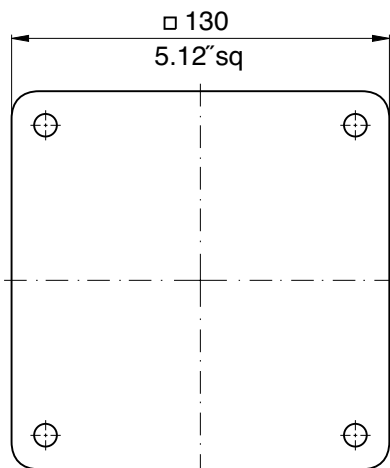

X100
X200
X400
X630

Acc. to IEC 60947-3, EN 60947-3, VDE 0660 part 107

Insulation
Voltage¹

U_i

V

690
690

Thermal
Current

I_u/I_{th}^2

A

80 (63)
180 (150)

Motor Rating AC-20B³

3 phase, 3 pole

380-440 V 500 V

A

80
125

A

80
125

690
690
690
690

125 (100)
240 (200)
450 (400)
630 (560)

125
240
300
300

125
240
250
250

How to order

Disconnectors and Main Switches according to IEC 60947-3 see Catalog 500

Three types of data (shown below) are required for ordering Blue Line cam-operated switches. Code numbers for ordering are shown in this catalog.

1. Type of Switch

The type of switch required may be easily selected by referring to the table on page 2 which shows the thermal current, power rating and dimensions of each switch. For further technical details, refer to page 14.

2. Switch Function

The code numbers for standard switches shown on pages 5-10 indicate the switch function, escutcheon plate, handle and any optional extras.

Additional coding to modify type and color of handle and escutcheon plate is explained below.

3. Type of Mounting

Types of mounting are shown on page 11.

Specify the mounting code to indicate required mounting.

X63

A202-600

VE

Modification of Switches

The part number for switch function and options may be modified in cases where items are required other than standard. The modification may involve the escutcheon plate inscription, color combination of escutcheon plate and handle, type of escutcheon plate and handle or the optional extra.

Switch Size	Escutcheon Plate Frame	Handle	Escutcheon Plate Backing	Escutcheon Plate Lettering	Dash Number
S2, S3	electro-gray	electro-gray	brushed alu	black	-100
S2, S3	electro-gray	electro-gray	black	mat silver	-500
S2, S3	black	black	brushed alu	black	-600
S2, S3	black	black	black	mat silver	-700

The standard switch consists of a transparent escutcheon plate with brushed aluminum backing and black inscription. The escutcheon plate frame is black as well as the handle. Above there are further color combinations of escutcheon plate and handle which are available. The appropriate dash number must be substituted in the switch function coding to specify other color combinations as required.

Example: The complete coding for switch type X63 with a 3 pole ON/OFF switch function, electro-gray handle and electro-gray escutcheon plate frame with brushed aluminum backing and black inscription which reads 0-1 is as follows: **X63 A202-100 E**.

Switch Function and Configuration

X Switches

Function	Escutch. Plate	Type/Handle			Code	Stages			Connection Diagram
		X63-X200	X160, X400	X630		X63-X200	X160, X400	X630	

ON/OFF Switches with 60° Switching

1 pole					A200-600	1	1	1	<p>X63, X100, X200</p> 1 pole 2 pole 3 pole 4 pole 5 and 6 pole <p>X160, X400</p> 1 pole 2 pole 3 pole 4 pole 5 and 6 pole <p>X630</p> 1-6 pole
2 pole					A201-600	1	1	1	
3 pole					A202-600	1	1	2	
4 pole					A203-600	1	2	2	
5 pole					A341-600	1	2	3	
6 pole					A342-600	1	2	3	
1 pole					A200-620	1	1	1	<p>X63, X100, X200</p> 1 pole 2 pole 3 pole 4 pole 5 and 6 pole <p>X160, X400</p> 1 pole 2 pole 3 pole 4 pole 5 and 6 pole <p>X630</p> 1-6 pole
2 pole					A201-620	1	1	1	
3 pole					A202-620	1	1	2	
4 pole					A203-620	1	2	2	
5 pole					A341-620	1	2	3	
6 pole					A342-620	1	2	3	

ON/OFF Switches with 90° Switching

1 pole contacts					A290-600	1	1	1	<p>X63, X100, X200</p> 1 pole 2 pole 3 pole 4 pole <p>X160, X400</p> 1 pole 2 pole 3 pole 4 pole <p>X630</p> 1-4 pole
2 pole preclose 30°					A291-600	1	1	1	
3 pole					A292-600	1	1	2	
4 pole					A293-600	1	2	2	
1 pole contacts					A290-620	1	1	1	<p>X63, X100, X200</p> 1 pole 2 pole 3 pole 4 pole <p>X160, X400</p> 1 pole 2 pole 3 pole 4 pole <p>X630</p> 1-4 pole
2 pole preclose 30°					A291-620	1	1	1	
3 pole					A292-620	1	1	2	
4 pole					A293-620	1	2	2	

Function	Escutch. Plate	Type/Handle			Code	Stages			Connection Diagram
		X63-X200	X160, X400	X630		X63-X200	X160, X400	X630	

Double-throw Switches without “OFF” 60° Switching







































Function	Escutch. Plate	Type/Handle			Code	Stages			Connection Diagram
		X63-X200	X160, X400	X630		X63-X200	X160, X400	X630	
1 pole					A220-600	1	1	1	<p>X63, X100, X200</p> <p>X160, X400</p> <p>X630</p>
2 pole					A221-600	1	2	2	
3 pole					A222-600	1	2	3	
4 pole					A223-600	2	3	4	
5 pole					A369-600	2	4		
6 pole					A370-600	2	4		

Double-throw Switches with Center “OFF” 60° Switching

Function	Escutch. Plate	Type/Handle			Code	Stages			Connection Diagram
		X63-X200	X160, X400	X630		X63-X200	X160, X400	X630	
1 pole					A210-600	1	1	1	<p>X63, X100, X200</p> <p>X160, X400</p> <p>X630</p>
2 pole					A211-600	1	2	2	
3 pole					A212-600	1	2	3	
4 pole					A213-600	2	3	4	
1 pole					A210-620	1	1	1	<p>X63, X100, X200</p> <p>X160, X400</p> <p>X630</p>
2 pole					A211-620	1	2	2	
3 pole					A212-620	1	2	3	
4 pole					A213-620	2	3	4	

Function	Escutch. Plate	Type/Handle			Code	Stages			Connection Diagram
		X63-X200	X160, X400	X630		X63-X200	X160, X400	X630	







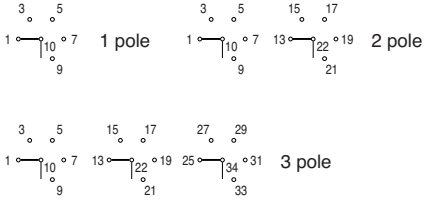
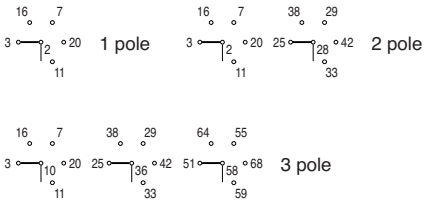







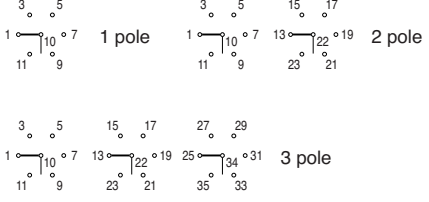
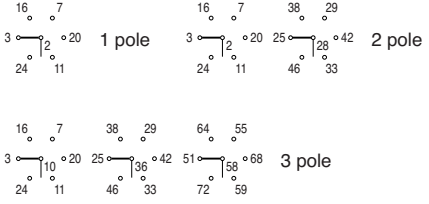

Multi-step Switches without "OFF"

1 pole 3 Step 2 pole 3 pole		  	  	  	A230-600 A250-600 A270-600	1 1 2	1 2 3	2 4 6	<p>X63, X100, X200</p>  1 pole  2 pole  3 pole <p>X160, X400</p>  1 pole  2 pole  3 pole <p>X630</p>  1 pole  2 pole  3 pole
1 pole 4 Step 2 pole 3 pole		  	  	  	A231-600 A251-600 A271-600	1 2 3	2 4 6	2 4 6	<p>X63, X100, X200</p>  1 pole  2 pole  3 pole <p>X160, X400</p>  1 pole  2 pole  3 pole <p>X630</p>  1 pole  2 pole  3 pole

*Type X400 with  handle

Function	Escutch. Plate	Type/Handle			Code	Stages			Connection Diagram
		X63- X200	X160, X400	X630		X63- X200	X160, X400	X630	






















Multi-step Switches without “OFF”

1 pole 5 Step 2 pole 3 pole		 	 		A232-600 A252-600 A272-600	1 2 3	2 4 6	3 6	<p>X63, X100, X200</p>  <p>X160, X400</p>  <p>X630</p> 
1 pole 6 Step 2 pole 3 pole		 	 		A233-600 A253-600 A273-600	1 2 3	2 4 6	3 6	<p>X63, X100, X200</p>  <p>X160, X400</p>  <p>X630</p> 














*Type X400 with  handle

Function	Escutch. Plate	Type/Handle			Code	Stages			Connection Diagram		
		X63-X200	X160, X400	X630		X63-X200	X160, X400	X630			

Multi-step Switches without “OFF”







































1 pole 7 Step					A234-600	2	4	4	<p>X63 X100 X200</p> 	<p>X160 X400</p> 	<p>X630</p> 
1 pole 8 Step					A235-600	2	4	4	<p>X63 X100 X200</p> 	<p>X160 X400</p> 	<p>X630</p> 
1 pole 9 Step					A236-600	2	4	5	<p>X63 X100 X200</p> 	<p>X160 X400</p> 	<p>X630</p> 

Multi-step Switches with “OFF”

1 pole 2 Step 2 pole 3 pole					A240-600 A260-600 A280-600	1 1 1	1 2 3	1 2 3	<p>X63, X100, X200</p> <p>1 pole:  1 pole</p> <p>2 pole:  2 pole</p> <p>3 pole:  3 pole</p> <p>X160, X400</p> <p>1 pole:  1 pole</p> <p>2 pole:  2 pole</p> <p>3 pole:  3 pole</p> <p>X630</p> <p>1 pole:  1 pole</p> <p>2 pole:  2 pole</p> <p>3 pole:  3 pole</p>
-----------------------------------	---	---	---	---	----------------------------------	-------------	-------------	-------------	--




Function	Escutch. Plate	Type/Handle			Code	Stages			Connection Diagram
		X63-X200	X160, X400	X630		X63-X200	X160, X400	X630	

Multi-step Switches with “OFF”

1 pole 3 Step 2 pole 3 pole		  	  	  	A241-600 A261-600 A281-600	1 1 2	1 2 3	2 4 6	X63, X100, X200	 1 pole	 2 pole	 3 pole
									X160, X400	 1 pole	 2 pole	 3 pole
1 pole 4 Step 2 pole 3 pole		  	  	  	A242-600 A262-600 A282-600	1 2 3	2 4 6	2 4 6	X63, X100, X200	 1 pole	 2 pole	 3 pole
									X160, X400	 1 pole	 2 pole	 3 pole
									X630	 1 pole	 2 pole	 3 pole
									X630	 1 pole	 2 pole	 3 pole

*Type X400 with  handle

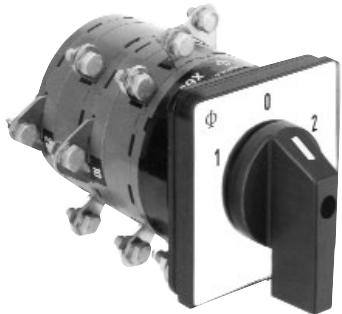



<p>Four Hole Panel Mounting and Base Mounting</p>	<p>Code</p>	<p>X63, X160</p>	<p>X100, X200- X630</p>
--	--------------------	----------------------	---------------------------------


	<p>Panel Mounting</p> <p>Four hole panel mounting</p> <p>Four hole panel mounting, protection IP 65</p>	<p>E</p> <p>EF</p>	<p>●</p> <p>●</p>	<p>●</p> <p>●</p>			
	<p>Panel and base mounting</p> <p>Four hole panel mounting</p> <p>Four hole panel mounting, protection IP 65</p>				<p>ER</p> <p>ERF</p>	<p>●</p> <p>●</p>	<p>●</p> <p>●</p>
	<p>Base Mounting</p> <p>Four hole panel mounting</p>						

Handles


Type	Color	Code	Size	
			S2	S3

Type	Color	Code	Size	
			S2	S3

<p>R-Handle</p> 	black red white electro-gray	G001 G002 G003 G007	● ● ● ● ● ● ● ●
<p>F-Handle</p> 	black red white electro-gray	G221 G222 G223 G227	● — ● — ● — ● —
<p>Handwheel</p> 	black	G971	— ●
<p>Capstan Handle</p> 	black	G931	— ●

<p>I-Handle</p> 	black red white electro-gray	G251 G252 G253 G257	● ● ● ● ● ● ● ●
<p>K-Handle</p> 	black red white electro-gray	G411 G412 G413 G417	● ● ● ● ● ● ● ●
<p>P-Handle</p> 	black red white electro-gray	G211 G212 G213 G217	● ● ● ● ● ● ● ●

Escutcheon Plates

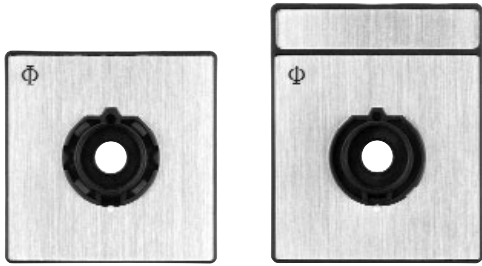


Square and rectangular escutcheon plates are available for each size of switch. The escutcheon plate consists of a frame and a faceplate having the switch positions which is then embossed with hot-foil backing. The escutcheon plate frame is an essential part of the switch and serves as a bearing surface for the handle. If the switch is to be mounted without an escutcheon plate we would recommend the handle bearing plate T100-04.


Standard Letterings Available

(over 500 standard letterings, special letterings on request)


30° switching

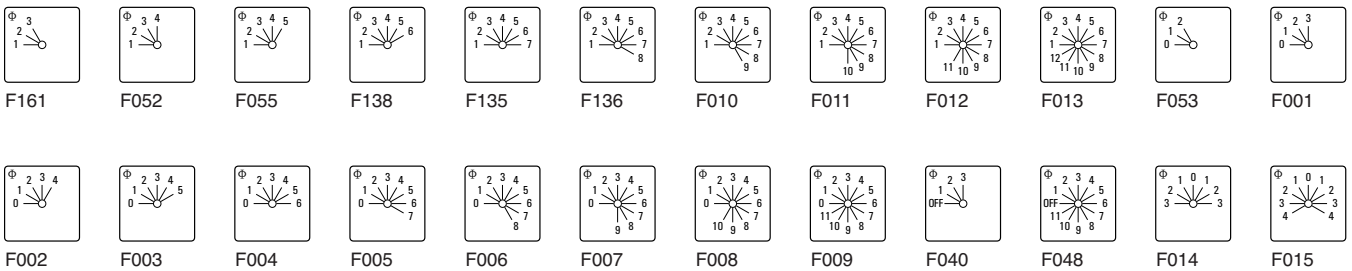


45° switching

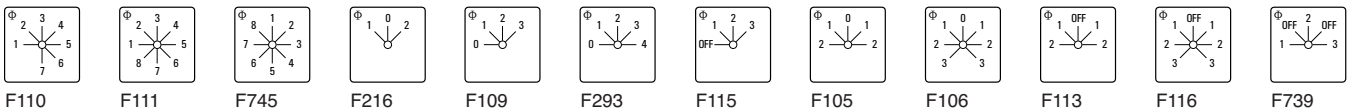


60° switching

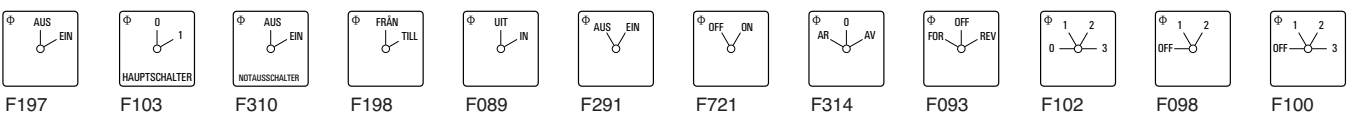

90° switching

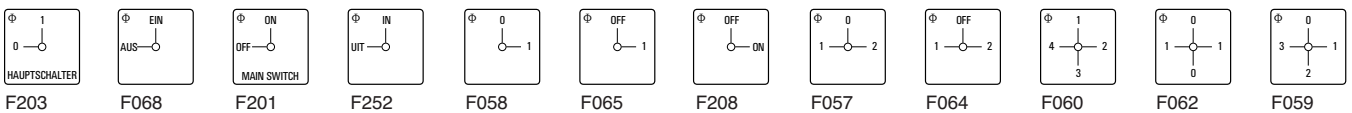

Miscellaneous

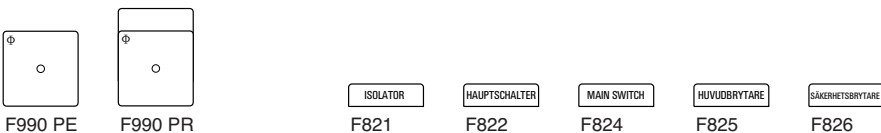




Selection Data	X63	X100	X160	X200	X400	X630
-----------------------	-----	------	------	------	------	------

Rated Insulation Voltage U_i IEC 60947-3, EN 60947-3 ¹ VDE 0660 part 107 ¹ UL/CSA ²	V V	690 600	690 600	690 600	690 600	690 600	690 600
Rated Operational Voltage U_e IEC 60947-3, EN 60947-3 ¹ VDE 0660 part 107 ¹ UL/CSA ²	V V	500 600	500 600	500 600	500 600	500 600	500 600
Rated Impulse Withstand Voltage U_{imp} ¹	kV	6	6	6	6	6	6
Rated Thermal Current I_U/I_{th} IEC 60947-3, EN 60947-3 VDE 0660 part 107 Ambient temp. +35 °C during 24 hours with peaks up to +40 °C Ambient temp. +55 °C during 24 hours with peaks up to +60 °C UL/CSA ²	A A A	80 63 80/63	125 100 150/100	180 150 180/160	240 200 250/200	450 400 400	630 560 630
Rated Operational Current I_e AC-20A No-load operation ³ IEC 60947-3, EN 60947-3 VDE 0660 part 107 500 V Occasional switching under load $\cos \varphi 0,8$ (AC-20B) ³ 3 phase, 3 pole and 440 V 1 phase, 2 pole 500 V AC-21B Switching of resistive loads, including moderate overloads 3 phase, 3 pole and 1 phase, 2 pole 500 V Interrupting Rating UL/CSA ² 600 V	A A A A A	80 80 80 63 63	125 125 125 100 100	180 125 100 80 63/80	240 240 240 200 150/200	450 300 250 200 150/200	630 300 250 200 150/200
Short Circuit Protection Max. fuse size (gL-characteristic) Rated short-time withstand current (1 s-current)	A kA	80	125	200	250 on request	500	630
DC Switching Capacity No. of series contacts 1 2 3 4 5 6 8 Voltage V	A A	63 11 2,2	100 15 2,5	80 12 2,5	200 22 -	220 25 -	- - -
Inductive loads T = 50 ms	A	63 18 6 1,8	100 25 7 2	80 20 7 2	200 32 8 -	220 35 - -	- - - -
Terminals - Use copper wire only connection screw length	for Ø mm	M6 15	M8 16	M10 20	M10 20	M12 30	M16 30
Ambient Temperature of Stages ⁴		55 °C during 24 hours with peaks up to 60 °C at 100 % load, permissible load see Rated Thermal Current I_U/I_{th} .					

¹Valid for lines with grounded common neutral termination, overload category III, pollution degree 3. Values for other supply systems on request.
²International Standards and Approvals, refer to page 15. ³Valid for ambient temperature max. 35 °C. ⁴For electromagnetic optional extras see additional data in Catalog 101.

International Standards and Approvals

Country	Authority	Mark or Standard	X63	X100	X160	X200	X400	X630
USA	Underwriters Laboratories		●	●	●	●	●	●
Canada	Canadian Standards Association		●	●	●	●	●	●
Switzerland	Schweizerischer Elektrotechnischer Verein		+	+	+	+	+	+
Federal Republic of Germany	Verband Deutscher Elektrotechniker	VDE 0660 ¹	+	+	+	+	+	+
Great Britain	British Standards Institution	BS EN 60947 ¹	+	+	+	+	+	+
International Electrical Commission (IEC) Recommendation		IEC 60947 ²	+	+	+	+	+	+
Europäisches Komitee für Elektrotechnische Normung (CENELEC)		EN 60947 ²	+	+	+	+	+	+

● Switch approved


+ Switch conforms to requirements



¹Industrial switchgear is not required to bear a symbol but must conform to requirements. By referring to the specific specification on the product the manufacturer implies that these requirements have been met.



²IEC and CENELEC do not operate an approval scheme.



Dimensions mm
 inch


Escutcheon Plates and Handles	Size	A	B	C	D1ø	D2ø	Escutcheon Plates and Handles	Size	A	B	C	D1ø	D2ø
-------------------------------	------	---	---	---	-----	-----	-------------------------------	------	---	---	---	-----	-----

PE-Escutcheon Plate													
	S2	88		8,5									
		3.46		.34									
	S3	130		10									
		5.12		.39									

R-Handle							I-Griff						
	S2	30	42	5	25,4	50		S2	35	43,8	5	25,4	50
		1.18	1.65	.20	1	1.97			1.38	1.72	.20	1	1.97
	S3	47	63	5	37	77,6		S3	54	64,8	5	37	77,6
		1.85	2.48	.20	1.46	3.06			2.13	2.55	.20	1.46	3.06

F-Handle							K-Handle						
	S2	44,7	45	5	25,4	50		S2	55	71	5	25,4	50
		1.76	1.77	.20	1	1.97			2.17	2.80	.20	1	1.97
								S3	75	106	5	37	77,6
									2.95	4.18	.20	1.46	3.06

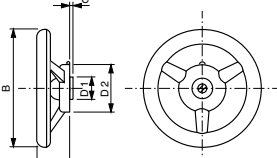Handwheel							P-Handle						
	S3	55	200	5	37	79,5		S2	70	68	5	25,4	50
		2.17	7.87	.20	1.46	3.13			2.76	2.68	.20	1	1.97
								S3	81	85	5	37	77,6
									3.19	3.35	.20	1.46	3.06

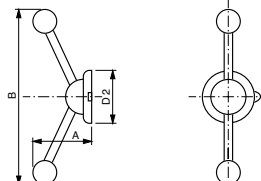
Capstan Handle													
	S3	110	350		74								
		4.33	13.78		2.91								

Dimensions mm
 inch

Four Hole Panel Mounting

X63 X100 X200


E, EF

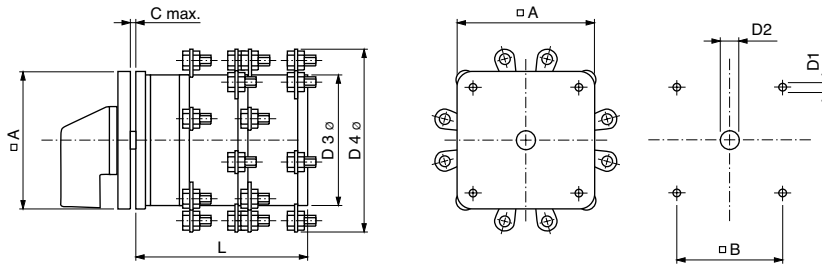

A	88 3.46	130 5.12	130 5.12
B	68 2.68	104 4.09	104 4.09
C	7.5 .30	4.5 .18	4.5 .18
D1	6 .24	7 .28	7 .28
D2	13-17 .51-.67	15.5-20 .61-.79	15.5-20 .61-.79
D2 EF	26-30 1.02-1.18	22-25 .87-.98	22-25 .87-.98
D3	84 3.31	128 5.04	128 5.04
D4	120 4.72	170 6.69	188 7.40

No. of stages		1	2	3	4	5	6
X63	mm	72.5	110.5	148.5	186.5	224.5	262.5
	inch	2.85	4.35	5.85	7.34	8.84	10.33
X100	mm	84	128	172	216	260	304
	inch	3.31	5.04	6.77	8.5	10.24	11.97
X200	mm	90	140	190	240	290	340
	inch	3.54	5.51	7.48	9.45	11.42	13.39


ER, ERF

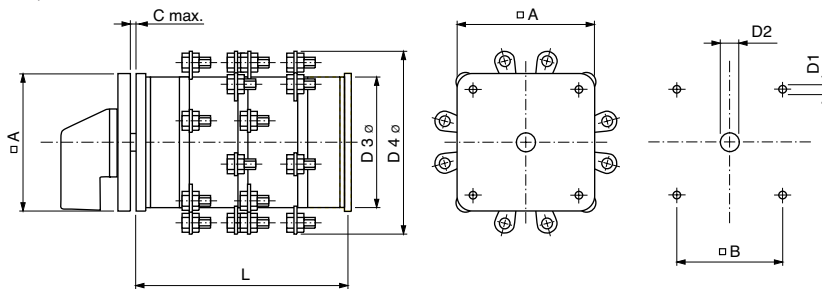

A	88 3.46	130 5.12	130 5.12
B	68 2.68	104 4.09	104 4.09
C	5.5 .22	7 .28	7 .28
D1	6 .24	7 .28	7 .28
D2	13-17 .51-.67	15.5-20 .61-.79	15.5-20 .61-.79
D2 ERF	26-30 1.02-1.18	22-25 .87-.98	22-25 .87-.98
D3	84 3.31	128 5.04	128 5.04
D4	120 4.72	170 6.69	188 7.40

No. of stages		1	2	3	4	5	6
X63	mm	100	138	176	214	252	290
	inch	3.93	5.43	6.93	8.42	9.92	11.41
X100	mm	116	160	204	248	292	336
	inch	4.57	6.3	8.03	9.76	11.5	13.23
X200	mm	122	172	222	272	322	372
	inch	4.8	6.77	8.74	10.71	12.68	14.65

VE

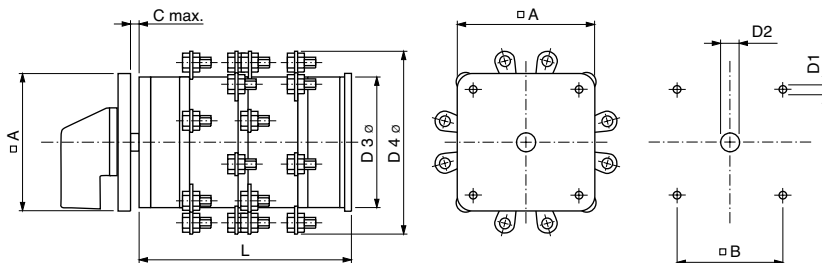


A	88 3.46	130 5.12	130 5.12
B	68 2.68	104 4.09	104 4.09
C	16 .63	19.3 .76	19.3 .76
D1	6 .24	7 .28	7 .28
D2	13-17 .51-.67	15.5-20 .61-.79	15.5-20 .61-.79
D3	84 3.31	128 5.04	128 5.04
D4	120 4.72	170 6.69	188 7.40

No. of stages		1	2	3	4	5	6
X63	mm	99.5	137.5	175.5	213.5	251.5	289.5
	inch	3.91	5.41	6.91	8.4	9.9	11.39
X100	mm	115.5	159.5	203.5	247.5	291.5	335.5
	inch	4.55	6.28	8.01	9.74	11.48	13.21
X200	mm	121.5	171.5	221.5	271.5	321.5	371.5
	inch	4.78	6.75	8.72	10.69	12.66	14.63

Dimensions mm
 inch

Four Hole Panel Mounting **X630**


E, EF

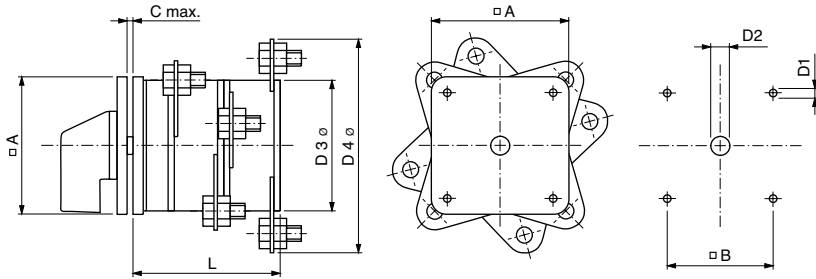

A	130	
	5.12	
B	104	
	4.09	
C	4.5	
	.18	
D1	7	
	.28	
D2	E	15.5-20
		.61-.79
D2	EF	22-25
		.87-.98
D3	128	
	5.04	
D4	218	
	8.58	

No. of stages		1	2	3	4	5	6
X630	mm	90	146	202	258	314	370
	inch	3.54	5.75	7.95	10.16	12.36	14.57


ER, ERF

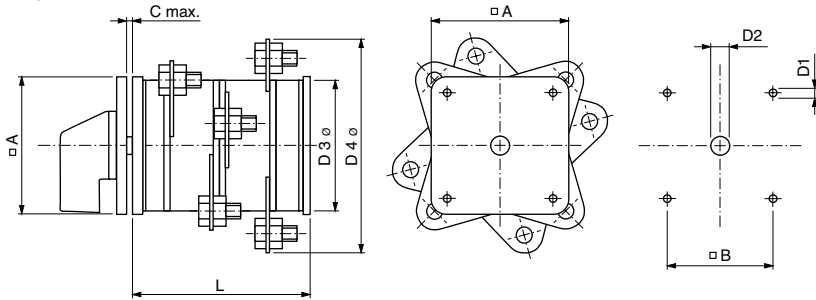

A	130	
	5.12	
B	104	
	4.09	
C	7	
	.28	
D1	7	
	.28	
D2	ER	15.5-20
		.61-.79
D2	ERF	22-25
		.87-.98
D3	128	
	5.04	
D4	218	
	8.58	

No. of stages		1	2	3	4	5	6
X630	mm	122	178	234	290	346	402
	inch	4.8	7.01	9.21	11.42	13.62	15.83

VE

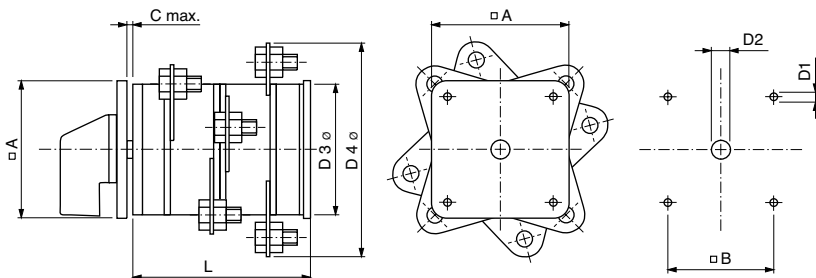

A	130
	5.12
B	104
	4.09
C	19.3
	.76
D1	7
	.28
D2	15.5-20
	.61-.79
D3	128
	5.04
D4	218
	8.58

No. of stages		1	2	3	4	5	6
X630	mm	121.5	177.5	233.5	289.5	345.5	401.5
	inch	4.78	6.99	9.19	11.4	13.6	15.81

The Range of “Blue Line” Switchgear

Technical literature covering the following products is available on request.

	Catalog Number
Main Switches and Main Switches with Emergency Function 16 A-315 A Maintenance Switches 20 A-315 A Switch Disconnectors 20 A-315 A According to IEC 60947-3, EN 60947-3, VDE 0660 part 107, IEC 60204, EN 60204 and VDE 0113	500
CL Switches 10 A-20 A C, CA and CAD Switches 10 A-315 A and L Switches 350 A-2400 A C, CA and CAD switches are designed for universal application. They are recommended for instrument, isolator, double-throw and motor control. L switches are designed for load and off-load applications. They are used to switch resistive or low inductive loads.	100
Optional Extras and Enclosures The complete product line, a large number of optional extras is available, including door interlocks, push-pull devices, cylinder and padlock attachments, control and indicator devices, AC motor drives, as well as enclosures, both insulated and metal.	101
A and AD Switches 6 A-25 A A and AD switches have 4 contacts in each switching stage. These switches provide an extensive range of switch functions and require a minimum mounting depth. Up to 36 switching positions are possible, with availability of 48 contacts per 12 stage switch column.	110
CG, CH and CHR Switches 10 A-25 A Ultra compact CG, CH and CHR switches are ideally suited for control and instrumentation applications. CG switch terminals are “finger-proof”, according to VDE 0106. Terminals are conveniently accessible for wiring and are delivered open. All CG4 switches offer specially designed gold plated contacts or H-bridges with “cross-wire” contact systems, which facilitates their use in electronic circuitry and chemically aggressive environments.	120
DH, DHR, DK and DKR Switches 6 A-16 A DH, DHR, DK and DKR switches incorporate unique corrosion resistant contacts that permit operation on system voltage as low as 1 V. They have fully enclosed and protected contacts which can be operated either by rotary and/or lateral handle movement. D switches are used in calibration and semiconductor circuits. They are also used for relay and contactor control.	130
X Switches 80 A-630 A X switches can be applied for load, tap and gang switching duties. They incorporate 6 contacts in each switching stage. Their compact design provides a minimum length dimension for mounting purposes.	140
KG Switches 20 A-315 A and KH and KHR Switches 16 A-80 A KG, KH and KHR switches are excellent circuit interruptors. They have high through fault and fault making capacities and are especially designed for use as isolators and safety switches for machine tools, distribution panels and switchboards. KG ON/OFF switches offer unusually high dimensioned air and creepage distances between terminals which are designed for time saving “straight-line” wiring. ON/OFF switches are available with up to 8 poles and double-throw switches are available with up to 4 poles.	150
Contactors 16 A-115 A and Motor Starters 1,1 kW-55 kW These include control relays, motor contactors, two and four pole output contactors, heating contactors, thermal overload relays.	200
Push Buttons and Pilot Lights, 22,5 mm Ø A complete range of state-of-the-art push buttons and pilot lights represent an ideal combination of functional security and economical efficiency in a modular design.	302

SALES AND SERVICE ORGANIZATION

Australia

australian solenoid Φ co. pty. ltd.

379 Liverpool Road, ASHFIELD, N.S.W. 2131
P. O. Box 1093, ASHFIELD, N.S.W. 1800
Tel: +61 2 9797-7333, Fax: 0092
e-mail: sales@austrasol.com.au

Austria

austro solenoid Φ ges.m.b.h.

Schumanngasse 35, Postfach 431
A-1181 WIEN
Tel: +43 1 404 06, Fax: 404 06-190
e-mail: aso@krausnaimer.com

Belgium, Luxembourg

solenoid benelux Φ b. v.

Stationstraat 34
B-3070 KORTENBERG
Tel: +32 2 757-0141, Fax: 1640
e-mail: info@solenoid.be

Brazil

solenoid do brasil Φ ltda.

Avenida Berna 230
04774-020 SAO PAULO
Tel: +55 11 5524-1288, Fax: 5521-4659/9633
e-mail: knbrasil@krausnaimer.com.br

Canada

canadian solenoid Φ inc.

219 Connie Crescent, Unit 13A
CONCORD, Ontario, L4K 1L4
Tel: +1 905 738-1666, Fax: 9327
e-mail: cdnsolenoid@cansol.on.ca

Chile

ASEA BROWN BOVERI S. A.
Vicuña Mackenna 1602, Casilla 3555
SANTIAGO DE CHILE
Tel: +56 2 544-7411, Fax: 7418

Cyprus

ELECTROMATIC CONSTRUCTIONS LTD.
72, Evagoras Pallikarides Str., CY-2235 LATSIA-Nicosia
P. O. Box 12630, CY-2251 LATSIA-Nicosia
Tel: +357 2 48 41 41, Fax: 48 57 47

Czech Republic

OBZOR, výrobní družstvo Zlín
Louky-Slanica 378
CZ-76413 ZLÍN
Tel: +420 57 7195-111/-153 (Techn. Supp.)
Fax: +420 57 7195-152/-138
e-mail: ots@obzor.cz

Denmark

C. THIIM A/S Ingeniørfirma
Transformervej 31
DK-2730 HERLEV
Tel: +45 44 85 80 00, Fax: 80 05
e-mail: thiim@thiim.com

Finland

suomen solenoid Φ oy

Karitie 7
FIN-01530 VANTAA
Tel: +358 9 825-4240, Fax: 42410
e-mail: etunimi.sukunimi@finsol.fi

France

solenoid france Φ s. a.

33, rue Bobillot
F-75013 PARIS
Tél: +33 1 58 40 80 80, Fax: 45 80 91 19
e-mail: sales@solfrance.fr

Germany

deutsche solenoid Φ vertriebs-gmbH

Wikingerstraße 20-28, D-76189 KARLSRUHE
Postfach 10 01 24, D-76231 KARLSRUHE
Tel: +49 721 59 88-0, Fax: 59 28 28
e-mail: desol@krausnaimer.com

Great Britain

u. k. solenoid Φ ltd.

115 London Road
NEWBURY/BERKSHIRE RG14 2AH
Tel: +44 1635 45991, Fax: 37807
e-mail: sales@uksol.co.uk

Greece

KALAMARAKIS-SAPOUNAS S. A.
Ionias & Neromilou Str., P. O. Box 46566
GR-13671 ACHARNES/ATHENS
Tel: +30 2 10 240-6000-6, Fax: 240-6007
e-mail: ksa@ksa.gr

Hungary

GANZ, Schalter- u. Geräterfabrik
X. Kőbányal út 41/c, Postfach 87
H-1475 BUDAPEST
Tel: +36 1 261-5479, Fax: 4685
e-mail: ganzkk@ganzkk.hu

Iceland

BRAEDURNIR ORMSSON EHF
Lágmúli 6-9, P. O. Box 8670
REYKJAVIK
Tel: +354 530-28 00, Fax: 28 10
e-mail: skuli@ormsson.is

Iran

RBS technische und kommerzielle
Beratungsgesellschaft mbH
Kohlriege 14
D-33758 SCHLOSS HOLTE
Tel: +49 5207 9111-0, Fax: 9111-19
e-mail: kontakt@rbs-gmbh.de

Republic of Ireland

irish solenoid Φ ltd.

Bay 145, Shannon Free Zone
SHANNON, Co. Clare
Tel: +353 61 704700, Fax: 471084
e-mail: salesirs@krausnaimer.ie

Italy

solenoid italia Φ s.r.l.

Via Terracini, 9
I-24047 TREVIGLIO (BG)
Tel: +39 0363-30 11 12, Fax: 30 21 13

Japan

solenoid japan Φ co. ltd.

Yoshiwada Building 2F
1-11-6 Hamamatsucho
Minato-Ku, TOKYO 105-0013
Tel: +81 3 3436-6151, Fax: 6325

Kuwait

AMMAR & PARTNERS ELECTRICAL CO.
P. O. Box 1871
13019 SAFAT
Tel: +965 483-0122/483-0133
Fax: +965 484-1818

Malaysia

INDUSTRIAL AUTOMATION (M) Sdn Bhd
30-3 & 30-4 Loke New Road
55200 KUALA LUMPUR
Tel: +60 3-9-2210511, Fax: 2222299
e-mail: inquiry@iasb.com.my

Mexico

ING. JAVIER CABALLERO B.
A. Gaviño 30, Satélite,
53100, Edo. de Mexico, MEXICO
Tel: +52 5555 62-7577, Fax: 0434
e-mail: j_caballero_b@infosel.net.mx

Netherlands

solenoid benelux Φ b. v.

Wegtersweg 38, Postbus 199
NL-7556 BR HENGLO (Ov.)
Tel: +31 74 291-9441, Fax: 8380
e-mail: info@solenoid.nl

New Zealand

new zealand solenoid Φ co. ltd.

42 Miramar Avenue, P. O. Box 15-009
WELLINGTON
Tel: +64 4 380-9888, Fax: 9877
e-mail: sales@nzsolenoid.co.nz

Norway

norsk solenoid Φ a/s

Hjalmar Brantings vei 8, P. O. Box 21, Økern
N-0508 OSLO
Tel: +47 22 64 44 20, Fax: 65 39 49
e-mail: nos@norsksol.no

Poland

ASTAT sp. z o.o.
ul. Dąbrowskiego 461
PL-60451 POZNAŃ
Tel: +48 61 848-8871/72, Fax: 8276
e-mail: info@astat.com.pl

Portugal

ELECTRICOL-DAMAS, FERREIRA & DAMASCENO, S. A.
Apartado 1083
P-2671-852 SANTO ANTÓNIO DOS CAVALEIROS
Tel: +351 21 989-8939, Fax: 988-6464

Kingdom of Saudi-Arabia

HAWA ELECTRIC PANEL BOARD FACTORY
Industrial Area, P. O. Box 1684
DAMMAM 31441
Tel: +966 3 847-2061, Fax: 2056

Singapore

solenoid singapore Φ pte. ltd.

115A, Commonwealth Drive
03-17/23
SINGAPORE 149 596
Tel: +65 6473-8166, Fax: 8643
e-mail: krausnaimer@singsol.com.sg

Slovenia

SCHRACK Energietechnik d.o.o.
Glavni trg 47
SI-2380 SLOVENJ GRADEC
Tel: +386 2 88 392 00, Fax: 434 71
e-mail: schrack.sg@schrack-energietechnik.si

Republic of South Africa

south african solenoid Φ co. pty. ltd.

7 Village Crescent, Linbro Village
Linbro Business Park, SANDTON 2065
P. O. Box 511, KELVIN 2054
Tel: +27 11 608-6060, Fax: 608-2874
e-mail: sales@sasolenoid.co.za

Spain

HAZEMEYER ESPAÑOLA S. A.
Crta. de Tiana s/n, Esq. N-2
BADALONA-BARCELONA
Tel: +34 93 389-4262, Fax: 384-3586
e-mail: heshaze@catworld.net

Sweden

skandinaviska solenoid Φ ab

Dr. Widerströms Gata 11, FRUÅNGEN
Box 42097, S-126 14 STOCKHOLM
Tel: +46 8 97 00 80, Fax: 97 87 33
e-mail: order@skansol.se

Switzerland

AWAG Elektrotechnik AG
Sandbühlstraße 2, Postfach
CH-8604 VOLKETSCHWIL
Tel: +41 1 908-1919, Fax: 1999
e-mail: info@awag.ch

Taiwan

NUWTEC ENTERPRISE Co Ltd
No. 301, Sec. 1, Nan Kang Road
TAIPEI 115, Taiwan, R. o. C.
Tel: +886 2 265-13279, Fax: 13264
e-mail: nathan.nuwtec@msa.hinet.net

Turkey

ÜNAL KARDEŞ ELEKTRİK GEREÇLERİ A. Ş.
Beşyol, Eski Londra Asfaltı-6
TR-34630 SEFAKÖY-Istanbul
Tel: +90 212 624-9204, Fax: 592-4810
e-mail: info@unal kardes.com.tr

USA

american solenoid Φ co. inc.

760 New Brunswick Road, P. O. Box 430
SOMERSET, NJ 08873
Tel: +1 732 560-1240, Fax: 8823
e-mail: amsol@krausnaimer-us.com

