


H0730 Dual Ethernet / USB Interface

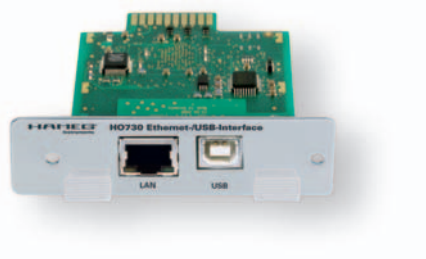

Ethernet 10/100MBit/s

Additionally integrated Web Server


Screenshot function using Web Server

USB 2.0 standard, USB Type B connector

For mounting into Oscilloscopes HM1008, HM1508, HM1008-2, HM1508-2, HM2008, Series HMO, HMS, HMF and HMP



H0740 IEEE-488 (GPIB) Interface

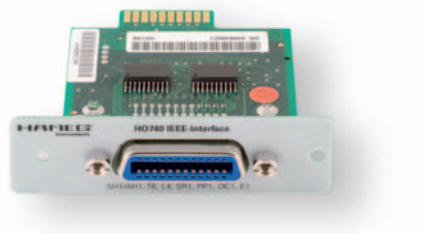

24-pin connection in accordance with IEEE-488 (socket)

Galvanic separation of test device and interface

For mounting into Oscilloscopes HM1008, HM1508, HM1008-2, HM1508-2, HM2008, Series HMO, HMS, HMF and HMP



H0880 IEEE-488 (GPIB) Interface



24-pin connection in accordance with IEEE-488 (socket)

Galvanic separation of test device and interface

Up to 15 devices on one IEEE-488 bus

For installation in Programmable Measuring Instruments Series 81XX, as well as included in delivery of HM7044G

